

Lithium Polymer Battery LP 402020P

rechargeable with PCB

Battery Dimensions [mm]

Length (L)	Max.22.0
Width (W)	Max.20.5
Thickness (T)	Max. 4.0 (delivery status) Max. 4.3 (after cycling)
Weight, approx. [g]	5
Cable length [mm]	100 +/-3, AWG26/1571
Contacts	Wires L1:2+/-1 red = + black = -

Electrical Parameter

Nominal Voltage [V]	3.7 (average)
Typical capacity [mAh]	110 (0.2C/3.0V at 20°C)
Minimum capacity C [mAh]	105 (0.2C/3.0V at 20°C)
Impedance initial [mΩ]	< 350 @ 1kHz at 4.2V
Max. Charge [mA]	105
Max. Charge Voltage [V]	4.20
Max. cont. Discharge [mA]	210
Life expectancy 0.5C/0.5C [20°C Cycles]	500 >80% of initial capacity
Operating temperature [°C]	Charge: 0 to 45 Discharge: -20 to 60
Storage Temperature	12 month at -20 to +25°C

Safety Parameter PCM

Overcharge Det. Voltage	4.280 +/-0.025 V
Overcharge Release Voltage	4.130 +/-0.050 V
Overdischarge Det. Voltage	2.800 +/-0.050 V
Overdischarge Rel. Voltage	3.100 +/-0.050 V
Overcurrent Det. Range	2-6 A

Delivery Status

Battery Voltage	3.7 – 3.9V
Battery Capacity	50-60%


Label

Standard	No label, printing on cell
----------	----------------------------

DYNAMIS LP 402020
3.7V 105mAh 0.378Wh
[Crossed wheel bin]-Symbol
Date

Certifications

Cell	UL1642
Battery	UN38.3, ROHS

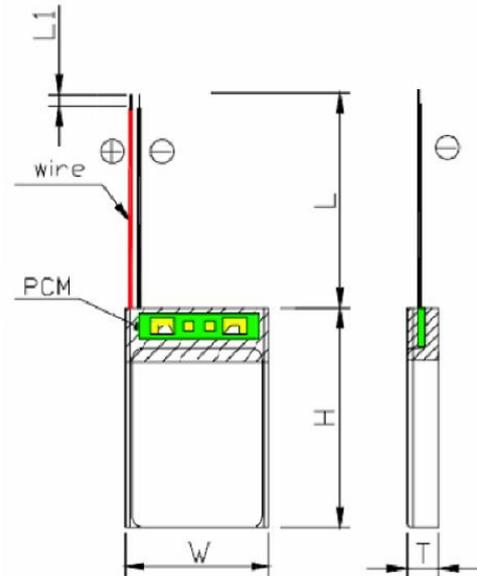

The information (subject to change without notice) contained in this document is for reference only and should not be used as a basis for product guaranty or warranty. For applications other than those described here, please consult your nearest DYNAMIS Sales or Marketing Office or Distributors.